

# 1C70 *Evanto*. Feel the flow.

*Evanto* was designed for active individuals who navigate varied indoor and outdoor environments and place a high value on a natural walking feeling, increased endurance and a high degree of comfort on uneven terrain.

## Designed for optimal outcomes

- *Evanto*'s innovative design stores the highest amount of energy at heel strike and returns it at toe off for enhanced forward propulsion.\*
- High-performance wedges allow for up to 24 mm of shock absorption at heel strike.\*
- When going down stairs or stepping off curbs, *Evanto* provides up to 9 mm of vertical shock absorption.\*
- Excellent multi-axial compliance provides stability and a high degree of comfort with up to 20° of sagittal plane motion, +/- 10° of m-l flexibility, and +/- 4° of torsional motion.\*
- Customizable forefoot and heel behavior to meet individual user needs.
- Waterproof, protected against fresh, salt and chlorinated water.

\*Comparison to state-of-the-art energy storing and return prosthetic feet like Taleo

More than a foot. A foundation.



waterproof

## Technical data

<b>Mobility grade</b>	2 – 4
<b>Max. body weight</b>	275 lbs (125 kg)
<b>Sizes</b>	22 – 30 cm
<b>Weight without footshell*</b>	15.9 oz (450 g)
<b>Footshell shape</b>	Normal shape with 10 +/- 5 mm heel height
<b>Footshell color</b>	beige (4), light brown (15)
<b>Weight with footshell*</b>	26.5 oz (725 g)
<b>Build height*</b>	3 1/4" (82 mm)

\* Reference size is 26 cm.

ottobock.



Shock absorption for user comfort

Multi-axial flexibility for adaptation to uneven terrain

Innovative energy management for improved endurance

# 1C70

## Order form.

### Customer

Customer no.	
Company	
Street	
Zip/Postal code	City
State/Province	
O&P professional	

### Shipping address (if different from customer address)

Customer no.	
Company	
Street	
Zip/Postal code	City
State/Province	
Customer ref.	


### Selection of the spring stiffness relative to body weight and foot size

Body weight	Foot size									
	22 cm	23 cm	24 cm	25 cm	26 cm	27 cm	28 cm	29 cm	30 cm	
up to 128 lbs (58 kg)	1	1	1	1	-	-	-	-	-	
129-159 lbs (59-72 kg)	2	2	2	2	2	2	2	2	2	
160-190 lbs (73-86 kg)	3	3	3	3	3	3	3	3	3	
191-220 lbs (87-100 kg)	4	4	4	4	4	4	4	4	4	
221-275 lbs (101-125 kg)	-	-	-	-	5	5	5*	5*	5*	

\* Do not combine this configuration with a 3C88-3 C-Leg or a 3C98-3 C-Leg.

### Example for ordering

**1C70=R26-4-P/4**

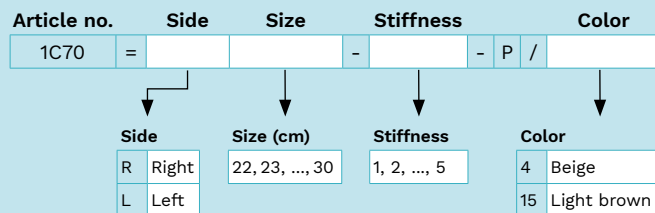

To order the foot module and footshell separately, please refer to our online shop and catalog.



The scope of delivery includes the 1C70 foot module, the 2C70 footshell including connection cover, the upper wedge set (comprising two wedges with different degrees of hardness), the lower wedge set (comprising two wedges with different degrees of hardness) and a black Spectra sock.

### Recommended combinations\*\*

TT	TF
4R136=EL One-way valve + 453A30/40 ProFlex Plus sleeve + 6Y95 Caleo 3D Liner or 4R180 Harmony P4 + 453A30/40 ProFlex Plus sleeve + 6Y512=*-P Uneo Fresh Liner	5A60 Varos Socket and 6Y200 Varos Liner or Laminated socket + 6Y110 Skeo Sealing + 21Y21 ClickValve
4R11=* Quickchange	3C60* Kenevo, 3R85* Dynion, 3C98* C-Leg, 3B1* Genium or 3B5* Genium X3
	4R57=WR Waterproof Rotation Adapter 4R11=* Quickchange
	3F1=* + 99B120=* Functional cosmesis

\*\* All components are sold separately and are available Ottobock products that are compatible with the 1C70 *Evanto* foot, which helps ensure optimal performance. Practitioners need to select components based upon individual patient criteria.